



Whitehall Manufacturing®
Manufacturer of Healthcare and Rehabilitation Products since 1946

Division of
Acom Engineering Company®



A MEMBER OF



Sports Cold Tanks

Use



S Series 110 Gallon Stationary Cold Tank

110-S-S-TO



110-S-S-TO-EG10

May Show Some Available Options

Whitehall 110-S-S-TO Stationary Cold Tank

Cold Tank Capacity is 110 gallons.

Cold Tank is 56"L x 24"W x 25"D and is seamless welded construction, fabricated from heavy gauge, type 304 stainless steel, polished to a satin finish. Cold Tank rim is reinforced with a concealed stainless steel rod. Tank bottom is seamless, coved (rounded) design for effective cleaning. Cold Tank is also provided with an extended stainless steel skirt flush to the floor line to conceal internal drain piping. A 2" Combination Drain Overflow is provided.

Cold Tank includes a Filler Spout (shipped loose) which may be field installed for use with a Supply Hose (provided by others). Filler Spout is chrome plated, solid brass construction and includes a 3/4" NPTI threaded inlet. Threaded High Polish Stainless Steel Drain Tube (2" Dia x 5" Lg. x 2"-22 UNE) with Chrome Plated Escutcheon are also provided to assist with waste connection.

GUIDE SPECIFICATIONS

Provide Whitehall Stationary Cold Tank (specify model number and options) with a 90-gallon capacity, 56"L x 24"W x 25"D. Cold Tank shall be fabricated from heavy gauge type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall be polished to satin finish. Cold Tank shall have a reinforced rim and shall be fitted with a stainless steel skirt flush to the floor line. Bottom Cold Tank shall be a seamless, rounded coved design. Provide a 2" combination Drain Overflow.

Please visit www.whitehallmfg.com
for most current specifications.



Whitehall Mfg. • P.O. Box 3527 • City of Industry, CA 91744 • (800) 591-9280 • (626) 968-6681

110-S-S-TO

NEW: 08/30/2024



MODEL NUMBER AND OPTION SELECTIONS

Capacity

☒ 110 Gallons

Series


☒ S Sports Series

Type

☒ -S Stationary Cold Tank


Suffix Options (See Cold Tank Options Section for Details)

- ☐ -AS2 Adjustable Suspension Seat
- ☐ -EG Enviro-Glaze® Color Powder Coating - Specify Color: <https://www.whitehallmfg.com/enviro-glaze>
- ☐ -LOGO Applied Logos: Team, Facility, Company Logo
- ☐ -SDO Separate Drain Overflow Assembly
- ☐ -TTS2 Tank Top Seat

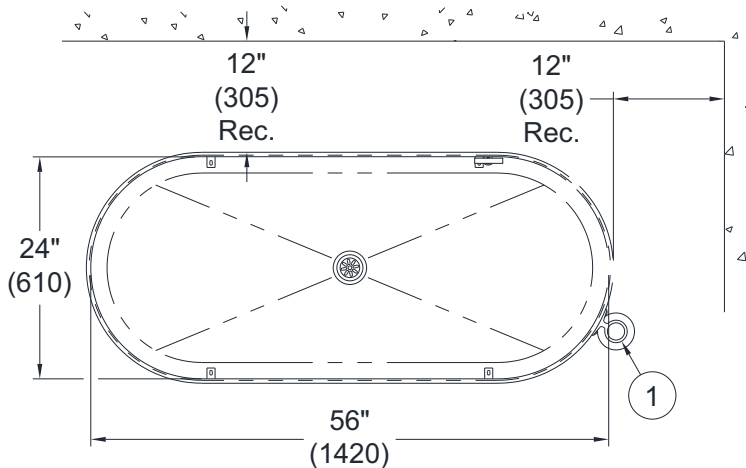

NOTES:

1. Combination Drain & Overflow Assembly
2. "L" Brackets - (4) Four Each
3. Stainless Steel Cold Tank
4. 2" O.D. x 5" Tailpiece
5. Floor Drain by Others

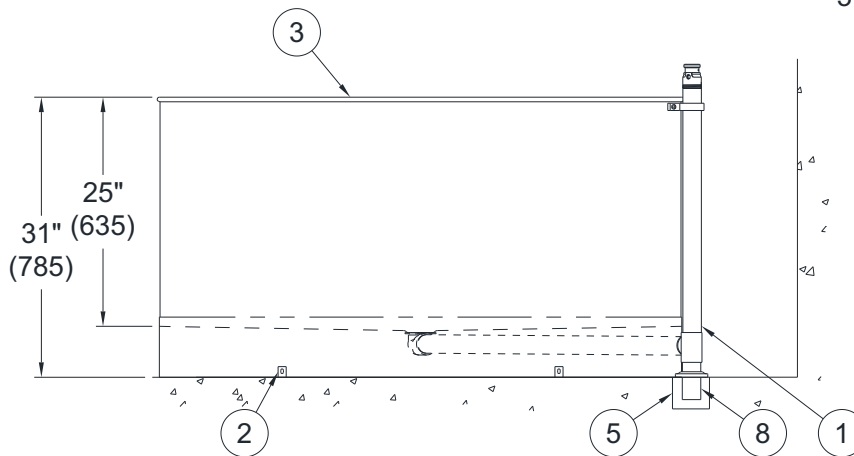

STATIONARY 110-S-S-TO SERIES COLD TANK

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data © Whitehall Manufacturing, Member of Morris Group International. Please visit www.whitehallmfg.com for most current specifications.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
Company _____ Date _____
Contact _____ Title _____
Approval for Manufacturing/Signature _____