



Whitehall Manufacturing®
Manufacturer of Healthcare and Rehabilitation Products since 1946

Surgical Scrub Sinks

Division of
Acorn Engineering Company®



A MEMBER OF



Whitehall Surgical Scrub sink Two Station

Model 4102

Please visit www.whitehallmfg.com
for most current specifications.



4102-PDM

Fixture May Show Some Available Options

Surgical Scrub Sink is designed for use in health care institutions providing surgeons with a convenient sink for pre-op scrub up.

Fixture is fabricated from heavy gage, type 304 stainless steel and is seamless welded construction polished to a satin finish. The cabinet interior is sound-deadened with a fire-resistant material.

Fixture Mounting: Scrub Sink unit is designed to be wall hung or supported on the floor. Specify optional -MC Wall Mounted Support Carrier or -PB Stainless Steel Pedestal Base for Floor mounting. (-MC Mounting Carrier requires appropriate wall depth to accommodate.)

Scrub Sink is provided with front panels which are easily removed for access to the water control valves and waste connections. Scrub sink has a sloping bottom surface to minimize splashing and a 1-1/2" OD tailpiece with a 3" flat strainer drain.

Backsplash has a gooseneck spout assembly with a 1-1/2" sprayhead that can be removed for sterilization. Spout outlet does not project directly into flat strainer drain.

T/P Temperature/Pressure Balancing Mixing Valve Control is located on each control panel and maintains a constant water temperature with a flow control of 2.5 GPM. This easily adjustable, anti-scald valve will automatically shut off if the hot or cold water supply fails. Valve is equipped with internal check stops for servicing and to prevent backflow.

Water Supply Valves are mechanical pilot type, actuated by one depression of a knee-operated front panel and turned off by a second depression. Optional -ETC Electronic Timing Controller or -SO Sensor Operation available in lieu of Knee Operation.

Optional -EFW Eye/Face Wash provides a Safety Manufacturing™ Model S0660 Series Swing Down Eye-Face Wash within Sink Trough and includes Factory installed Controls® Model ET71-1-BVS-OTG Safety Mixing Valve with Temperature Gauge and Stop Valves.

Models with -EFW Option comply with USP 800, Section 5.3 Eyewash Station Requirements.

GUIDE SPECIFICATION

Provide an Whitehall Two Station Surgical Scrub Sink (specify model number and options) 63-1/2" wide. Fixture shall be fabricated from heavy gage, type 304 stainless steel, with seamless welded construction polished to a satin finish. Cabinet interior shall have a sound-deadening, fire-resistant material. Cabinet shall also have removable panels to allow access to water control valves, waste connections, stops and strainers. Sink shall have a sloping bottom to minimize splashing, and a 3" flat strainer drain. Gooseneck spouts shall have a removable 1-1/2" sprayhead. Fixture shall have T/P temperature/pressure balancing mixing valves which are easily adjustable at the control panels. Manufacturer shall provide necessary installation instructions.

Please visit www.whitehallmfg.com
for most current specifications.



Complies
with the
following
standards:



UL 1951
CSA C22.2 Nos. 14 & 68



EMGI CONTROLS INSIDE

Whitehall Mfg. • P.O. Box 3527 • City of Industry, CA 91744 • (800) 782-7706 • (626) 968-6681



BASE MODEL NUMBER

☐ 4102 Surgical Scrub Sink (2 Station)

MOUNTING (Must Specify)

☐ -MC Mounting Carrier (Off-Floor Installation)
☐ -PB Pedestal Base (On-Floor Installation)


Product Options

☐ -DTD Digital Time Display
☐ -ETC Electronic Timing Controller (In lieu of Knee Operation)
☐ -EFW Eye/Face Wash (Must Specify Below)
☐ LH Station ☐ RH Station
NOTE: When specified, ET71-1-BVS-OTG Emergency Mixing Valve will be provided
☐ -LFN Laminar Flow Nozzle
☐ -PDM Metering Liquid Soap Dispenser
☐ -SA Splash Panel
☐ -SFS Soap Flush System
☐ -SO Sensor Operation (In lieu of Knee Operation)
☐ -SS Storage Shelf
☐ -SWV Swivel Nozzle on Gooseneck

Accessories


An appropriate Chronomite Instantaneous Tankless Water Heater may be purchased separately to ship with your scrub sink. Contact your sales rep for details or visit www.chromomite.com

Please visit www.whitehallmfg.com for most current specifications.

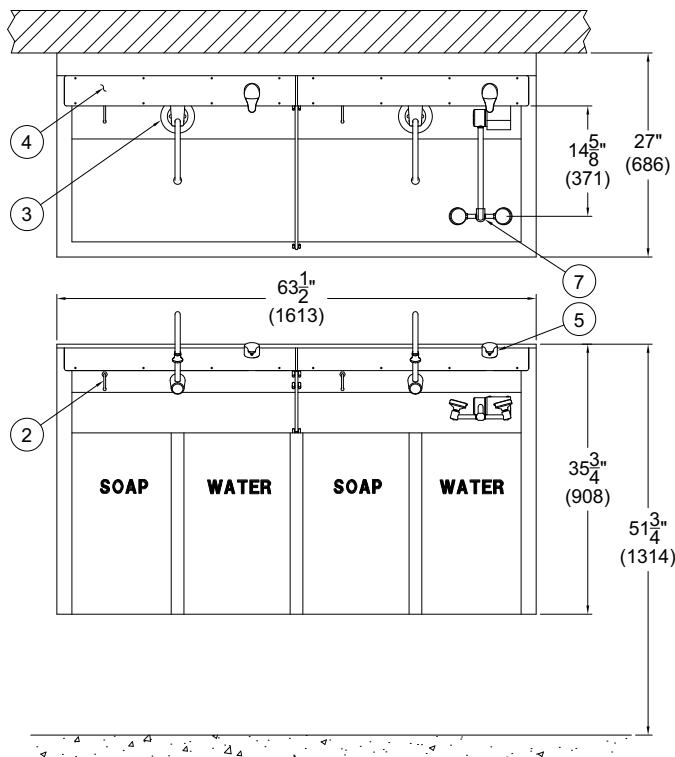

NOTES:

1. Gooseneck Spout Assembly
2. Optional -PDM Soap Dispenser
3. Flat Strainer Drain
4. Control Panel
5. T/P Mixing Valve
6. Optional -SA Splash Panel
7. Optional -EYW Eyewash

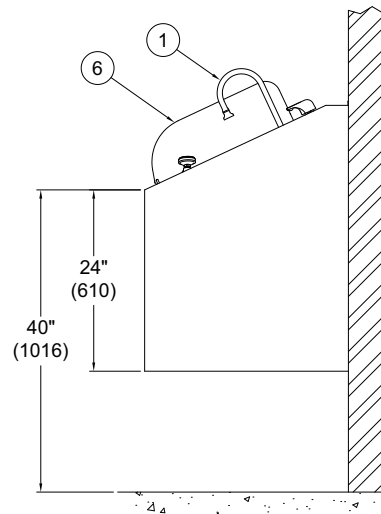

MODEL# 4102-EFW-RH-LFN-PDM-SA

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
Company _____ Date _____
Contact _____ Title _____
Approval for Manufacturing/Signature _____

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or suspended data. © Whitehall Manufacturing, Member of Morris Group International. Please visit www.whitehallmfg.com for most current specifications.