

Surgical Scrub Sinks



MORRIS GROUP

Whitehall **Surgical Scrub sink** Three Station

Model 4103

Please visit www.whitehallmfa.com for most current specifications.

4103-PDM

Fixture May Show Some Available Options

Surgical Scrub Sink is designed for use in health care institutions providing surgeons with a convenient sink for pre-op scrub up.

Fixture is fabricated from heavy gage, type 304 stainless steel and is seamless welded construction polished to a satin finish. The cabinet interior is sound-deadened with a fire-resistant material.

Fixture Mounting: Scrub Sink unit is designed to be wall hung or supported on the floor. Specify optional

-MC Wall Mounted Support Carrier or -PB Stainless Steel Pedestal Base for Floor mounting. (-MC Mounting Carrier requires appropriate wall depth to accommodate.)

Scrub Sink is provided with front panels which are easily removed for access to the water control valves, waste connections, stops and strainers. Scrub sink has a sloping bottom surface to minimize splashing and a 1-1/2" OD tailpiece with a 3" flat strainer drain.

Backsplash has a gooseneck spout assembly with a 1-1/2" sprayhead that can be removed for sterilization. Spout outlet does not project directly into flat strainer drain.

T/P Temperature/Pressure Balancing Mixing is located on each control panel and maintains a constant water temperature with a flow control of 2.5 GPM. This easily adjustable, anti-scald valve will automatically shut off if the hot or cold water supply fails. Valve is equipped with internal check stops for servicing and to prevent backflow.

Please visit www.whitehallmfg.com for most current specifications



Water Supply Valves are mechanical pilot type, actuated by one depression of a knee-operated front panel and turned off by a second depression. Optional -ETC Electronic Timing Controller or -SO available in lieu of Knee Sensor Operation Operation.

Optional -EFW Eye/Face Wash provides a Safety Manufacturing™ Model S0660 Series Swing Down Eye-Face Wash within Sink Trough and includes Factory installed Controls® Model ET71-1-BVS-OTG Safety Mixing Valve with Temperature Gauge and Stop Valves.

Models with -EFW Option comply with USP 800, Section 5.3 Eyewash Station Requirements.

GUIDE SPECIFICATION

Provide Whitehall Three Station Surgical Scrub Sink (specify model number and options) 94" wide. Fixture shall be fabricated from heavy gage, type 304 stainless steel, with seamless welded construction polished to a satin finish. Cabinet interior shall have a sound deadening, fire-resistant material. Cabinet shall also have removable panels to allow access to water control valves, waste connections, stops and strainers. Sink shall have a sloping bottom to minimize splashing, and a 3" flat strainer drain. Gooseneck spouts shall have a removable 1-1/2" sprayhead. Fixture shall have thermostatic mixing valves which are easily adjustable at the control panels. Manufacturer shall provide necessary installation instructions.





EMGICON ROLS INSIDE



Surgical Scrub Sinks

BASE MODEL NUMBER

☐ 4103 Surgical Scrub Sink (3 Station)

MOUNTING (Must Specify)

- ☐ -MC Mounting Carrier (Off-Floor Installation)
- ☐ -PB Pedestal Base (On-Floor Installation)

Product Options

- ☐ -DTD Digital Time Display
- -ETC Electronic Timing Controller (In lieu of Knee
 - Operation)
- □ -EFW Eye/Face Wash (Must Specify Below)
 - ☐ LH Station ☐ RH Station ☐ CTR Station NOTE: When specified, ET71-1-BVS-OTG Emergency Mixing Valve will be provided
- ☐ -LFN Laminar Flow Nozzle
- ☐ -PDM Metering Liquid Soap Dispenser
- ☐ -SA Splash Panel
- ☐ -SFS Soap Flush System
- -SO Sensor Operation (In lieu of Knee Operation)
- □ -SS Storage Shelf
- -SWV Swivel Nozzle on Gooseneck


Accessories


An appropriate Chronomite Instantaneous Tankless Water Heater may be purchased separately to ship with your scrub sink. Contact your sales rep for details or visit **www.chronomite.com**

Please visit **www.whitehallmfg.com** for most current specifications.

NOTES

- 1. Gooseneck Spout Assembly
- 2. Optional -PDM Soap Dispenser
- 3. Flat Strainer Drain
- 4. Control Panel
- 5. T/P Mixing Valve
- 6. Optional -SA Splash Panel
- 7. Optional -EFW Eye/Face Wash

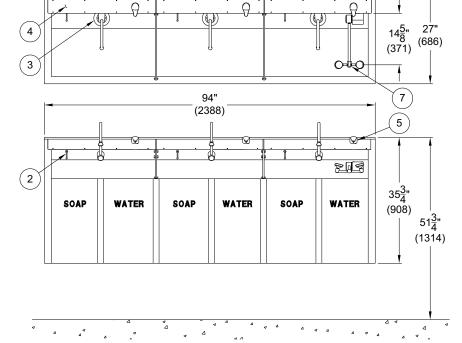



MODEL# 4103-EFW_RH-LFN-PDM-SA

▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility fo use of void or suspended data © Whitehall Manufacturing, Member of Morris Group International. Please visit www.whitehallmfg.com for most current specifications.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	
Model Number & Options	Quantity
Company	Date
Contact	_Title
Approval for Manufacturing/Signature	

Whitehall Mfg. • P.O. Box 3527 • City of Industry, CA 91744 • (800) 782-7706 • (626) 968-6681