

### **Wash-Up Sink**

Division of Acorn Engineering Company





# n Engineering Company

# Whitehall Wash-Up Sink ADA Compliant Two Station

Model 4172



Please visit **www.whitehallmfg.com** for most current specifications.



Fixture May Show Some Available Options

**Wash-Up Sink** is primarily intended for use in Healthcare institutions such as Pharmacies, Healthcare, Medical buildings, and Hospitals providing a convenient Sink to wash up.

**Fixture** is fabricated from 16 gage, type 304 stainless steel and is seamless welded construction with a satin finish. The Cabinet interior is sound-deadened with a fire-resistant material. The unit is designed with the capability of being installed on the wall using a Mounting Carrier.

**Wash-Up Sink** is provided with a Front Panel which is easily opened for access to Waste Connections, Stops and Strainers. Wash-Up Sink has a Sloping Bottom Surface to minimize splashing and a 1-1/4" OD Tailpiece with a Grid Strainer Drain and 1-1/2" O.D. P-Trap.

**Optional -EFW Eye/Face Wash** provides a Safety Manufacturing™ Model S0860 Series Swing Down Eye-Face Wash within Sink Trough.

**Models with -EFW Option** comply with USP 800, Section 5.3 Eyewash Station Requirements.

#### **GUIDE SPECIFICATION**

Provide Whitehall ADA Wash-up Sink (specify model number and option). Fixture shall be fabricated from 16 gage, type 304 stainless steel and is seamless welded construction with a satin finish. Cabinet interior shall have a sound deadening, fire-resistant material. Cabinet shall also have Removable Access Panel to allow access to Waste Connections, Stops and Strainers. Sink shall have a Sloping Bottom to minimize splashing, and a 3" Flat Strainer Drain offset left of the fixture.

Please visit www.whitehallmfg.com for most current specifications.



Complies with the following standards:







## **Wash-Up Sink**

#### **BASE MODEL NUMBER**

☐ 4172 Wash-Up Sink (2 Station)

#### **MOUNTING**

☐ -MC Mounting Carrier

#### **WASH-UP SINK FAUCET**

☐ -SO Sensor Operated Deck Mounted Spout Sensor Operated Deck Mounted Spout -

Battery Powered (batteries not included)

-9 Without Valve (Specify Drilling)

☐ -H1 Single 1-3/8" Dia. Hole Centered

-H34 Three Holes 4"Centerset (1-3/8" Dia. Holes)

-H38 Three Holes 8"Centerset (1-3/8" Dia. Holes)

#### **PRODUCT OPTIONS**

☐ -EFW Eye/Face Wash (Left Side Only)

**NOTE:** When specified, ET71-1-BVS-OTG Emergency Mixing Valve will be provided

☐ WHST70CP-12 ASSE 1070 Compliant Hot & Cold,

Temperature Mixing Valve

NOTE: Recommend One (1) Mixing

Valve Per Station.


Valve Specs: 4.5 GPM (17 LPM) @

45 PSI (310 kPa)

☐ 316 Stainless Steel In Lieu of Standard 304 STN STL


#### **Accessories**


An appropriate Chronomite Instantaneous Tankless Water Heater may be purchased separately to ship with your Wash-Up sink. Contact your sales rep for details or visit **www.chronomite.com** 

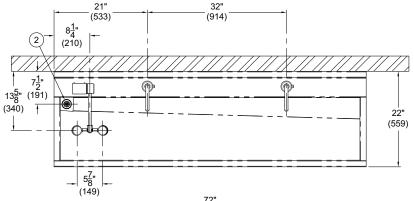

#### NOTES:

- 1. SENSOR OPERATED SPOUT
- 2. GRID STRAINER AND 1-1/4" TAILPIECE
- 3. HINGED ACCESS PANEL
- 4. CYLINDER LOCK
- 5. OPTIONAL -EFW EMERGENCY EYE/FACE WASH, SHOWN

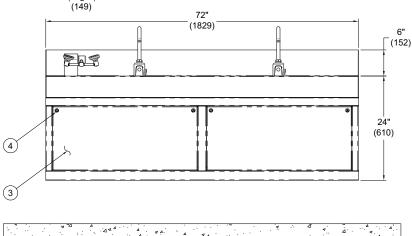



#### MODEL # 4172

▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility fo use of void or suspended data © Whitehall Manufacturing, Member of Morris Group International. Please visit www.whitehallmfg.com for most current specifications.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	
Model Number & Options	Quantity
Company	Date
Contact	Title
Approval for Manufacturing/Signature	

Whitehall Mfg. • P.O. Box 3527 • City of Industry, CA 91744 • (800) 782-7706 • (626) 968-6681