



Whitehall Manufacturing
 Manufacturer of Healthcare and Rehabilitation Products since 1946

BestCare
 Patients, Not Prisoners

**Healthcare and Ligature
 Resistant Products**

Division of
 Acorn Engineering Company



A MEMBER OF



Whitehall Ligature Resistant Sensor Operated Faucet

Model WH3376-WSF-SO
 & WH3376-WSF-SO-BAT



U.S. DESIGN PATENT D704,8065

WH3376-WSF-SO

Fixture May Show Some Available Options

Ligature Resistant Sensor Operated Faucet

The Ligature Resistant Sensor Operated Faucet is designed and developed to retrofit existing lavatories or it can be specified for new design on decks with a thickness of 1-1/4" maximum. The Ligature Resistant Faucet is arranged to be mounted to the deck of the lavatory. Faucet assembly requires (3) 1-5/16" to 1-1/2" diameter holes on 6" or 8" centerset. Conical Faucet body is chrome plated brass, includes a multi-stream, non-aerated spray nozzle insert and provides vandal and Ligature Resistance.

Valve is a electronic valve with sensor operation. Valve includes 9VDC Sensor that will keep the solenoid open, allowing water to flow until the object is removed from sensor range. If an object is positioned in a manner that it is under constant detection the sensor will turn off the solenoid after 20 seconds. A 120VAC/9VDC plug-in transformer or a 6 AAA Battery Pack provided.

Optional -WHST70-12 Mixing Valve is ASSE 1070 compliant and delivers tempered water flow by compensating for pressure and temperature fluctuations. Valve is to be field set to 105 Fahrenheit and includes strainers and integral checks. Operating range is 30 to 100 psi.

Fixture is ADA Compliant. Unit conforms with ADA requirements for accessibility when installed correctly. Compliance is subject to the interpretation and requirements of the local code authority.

GUIDE SPECIFICATION

Provide and install Ligature Resistant Faucet Components (specify model number and options). Faucet valve shall be electronic, sensor operation. Assembly shall include 0.35 GPM flow control, 9VDC sensor and faucet connections.

Please visit www.whitehallmfg.com
 for most current specifications.



Member of
 U.S. Green
 Building
 Council



Recyclable
 Product



Water
 Conserving
 Product

Complies
 with the
 following
 standards:



Federal
 Public Law
 111-380
 (No Lead)

Whitehall Mfg. • P.O. Box 3527 • City of Industry, CA 91744 • (800) 782-7706 • (626) 968-6681 • Fax (626) 855-4862

WH3376-WSF-SO

NEW: 02/13/19




MODEL NUMBER AND OPTIONS SELECTION:

BASE MODEL NUMBER

- WH3376-WSF-SO Ligature Resistant Sensor Operated Faucet w/ Electronic Valve, Single Temp
- WH3376-WSF-SO-BAT Ligature Resistant Battery Powered Sensor Operated Faucet w/ Electronic Valve, Single Temp

OPTIONS:

- WHST70-12 ASSE 1070 Compliant Hot & Cold, Temperature / Pressure Balancing Mixing Valve

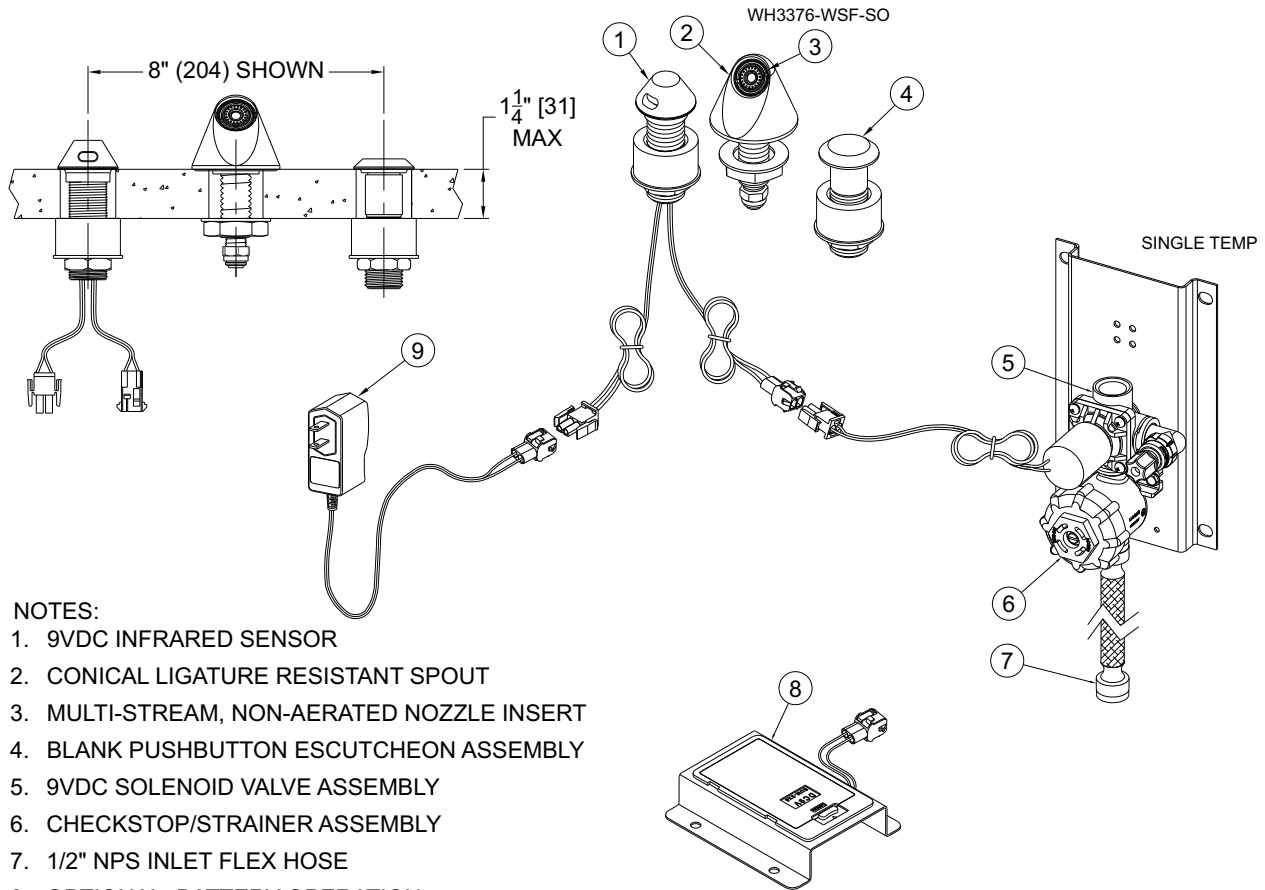

NOTES:

1. 9VDC INFRARED SENSOR
2. CONICAL LIGATURE RESISTANT SPOUT
3. MULTI-STREAM, NON-AERATED NOZZLE INSERT
4. BLANK PUSHBUTTON ESCUTCHEON ASSEMBLY
5. 9VDC SOLENOID VALVE ASSEMBLY
6. CHECKSTOP/STRAINER ASSEMBLY
7. 1/2" NPS INLET FLEX HOSE
8. OPTIONAL -BATTERY OPERATION INCLUDES BATTERY PACK AND BRACKET
9. 9VDC PLUG-IN TRANSFORMER

**OPTIONAL -BAT BATTERY
 OPERATION DETAIL**

DISCLAIMER:

This product is designed to decrease the probability that it may be utilized as an apparatus for ligature. It is not a replacement for professionals who are trained in the proper evaluation, management and supervision of persons at risk of suicide.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
 Company _____ Date _____
 Contact _____ Title _____
 Approval for Manufacturing/Signature _____

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data. Whitehall Manufacturing®, Member of Morris Group International. Please visit www.whitehallmfg.com for most current specifications.