



Whitehall **Ligature Resistant** Wall Shower

Model WH418-FH-CSH



US PATENTS - US 10,474,170 B2 & US D697,591

Ligature Resistant Shower

Shower is arranged to be installed on a finished wall and serviced through a removable front panel. Panel is fabricated from 18 gage, type 304 stainless steel with a white powder coat finish. Mounting frame is provided.

Conical Showerheads are chrome plated brass and provide vandal and suicide resistance. Spray pattern is a nonadjustable multi-stream style and provides a 1.5 GPM flow rate.

Valve, the T/P Mixing valve automatically mixes hot and cold water to deliver blended water within a specific range. Mixing Valve meets the most stringent performance criteria for temperature and pressure changes, defined by ASSE 1016. Valve conforms with lead free requirements of NSF61, Section 9, 1997 and CHSC 116875.

GUIDE SPECIFICATION

Provide and install a Best-Care™ Ligature Resistant Front Mounted Shower, Panel shall be fabricated of 18 gage type 304 stainless steel powder coated white. Mounting Frame shall be fabricated from 16 gage type 304 stainless steel with 18 gage stainless steel tiling flanges. Fixture shall be furnished with two fixed conical showerheads, a control valve, a diverter valve both with Chrome Plated, Patented ADA Compliant Ligature Resistant Tri-Lever Handles. Fixture shall be furnished with necessary fasteners for proper installation.

NOTE: Due to limits in manufacturing, unit does not fully conform with ADA Requirements

Please visit www.whitehallmfg.com for most current specifications













Whitehall Mfg. > P.O. Box 3527 > City of Industry, CA 91744 > (800) 782-7706 > (626) 968-6681

Revised: 12/06/2024


Division of Acorn Engineering Company®


MODEL NUMBER AND OPTIONS SELECTION:

BASE MODEL NUMBER

☐ WH418-FH-CSH

Flush Mount Ligature Resistant Wall Shower w/ Fixed Head and Mounting Frame (Powder Coated White)

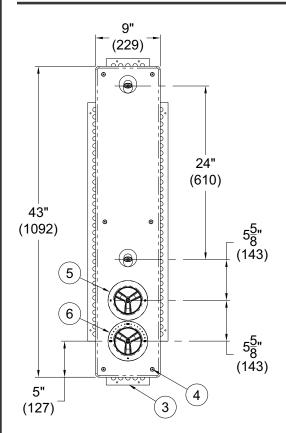

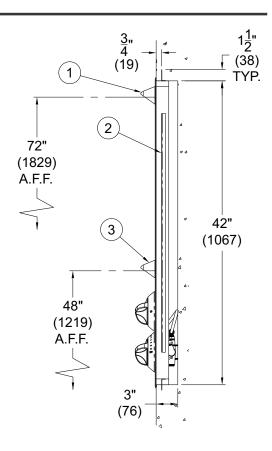

WH418-FH-CSH

NOTES:

- 1. Conical Shower Head.
- 2. Wall Mounting Flange w/ Plaster Flange.
- 3. Fixed Conical Shower Head At 48".
- 4. Tamper Resistant Fasteners.

- 5. Diverter Valve w/ Patented ADA Compliant, Ligature Resistant Tri-Lever Handle.
- 6. T/P Mixing Valve w/ Patented ADA Compliant, Ligature Resistant Tri-Lever Handle.

DISCLAIMER:

This product is designed to decrease the probability that it may be utilized as an apparatus for ligature. It is not a replacement for professionals who are trained in the proper evaluation, management and supervision of persons at risk of suicide.

▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____Quantity _____

Company _____Date ____

Contact ____Title ____

Approval for Manufacturing/Signature ______

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility fo use of void or suspended data © Whitehall Manufacturing, Member of Morris Group International.

Whitehall Mfg. > P.O. Box 3527 > City of Industry, CA 91744 > (800) 782-7706 > (626) 968-6681